

# GENUINE CARGO TRAY

## INSTALLATION AND USER'S INSTRUCTIONS

Thank you for purchasing a Genuine Mazda Accessory.



Before removal and installation, be sure to thoroughly read these instructions.


Please read the contents of this booklet to properly install and use the cargo tray. Your safety depends on it.


Keep these instructions with your vehicle records for future reference.



### WARNING

- There are several  WARNING and  CAUTION sections in this booklet concerning safety when installing or removing the cargo tray. Always read and follow the instructions in order to prevent injuries, accidents, and possible damage to the vehicle.

 **WARNING:** Indicates a situation in which serious injury or death could result if the warning is ignored.

 **CAUTION:** Indicates a situation in which bodily injury or damage to the vehicle could result if the caution is ignored.

- Do not modify the cargo tray.
- Do not install the cargo tray in any way other than described in the following instructions.
- If in doubt, please contact your Mazda dealer to install the accessory in order to prevent errors in installation.
- Your cargo tray is designed to transport normal cargo contents. Flammable or dangerous materials should not be transported in your vehicle at any time. If any corrosive chemicals are spilled on your cargo tray, it should be cleaned as described in the Care and Cleaning section.
- If you have any questions about the use of the accessory, ask your Mazda dealer for proper advice before using it.
- Mazda and its suppliers are not responsible for injuries, accidents, and damage to persons and property that arise from the failure of the dealer or installer to follow these instructions.
- To ensure safety and reliability of the work, installation, removal and disposal work must be carried out by an Authorized Mazda Dealership.
- Be careful not to lose removed parts, and be sure that they are kept free of dirt, scratches, or damage.

**PART NAME : CARGO TRAY**  
**PART NUMBER : 0000-8B-N10**  
**VEHICLE : MAZDA CX-9**

#### NOTE


##### To the dealer

- Please turn over these instructions to the customer after installation.

##### To the customer

- Keep these instructions after installation. The instructions may be necessary for installing other optional parts or removal of this accessory.
- Should the vehicle or this accessory be resold, always leave these instructions with it for the next owner.









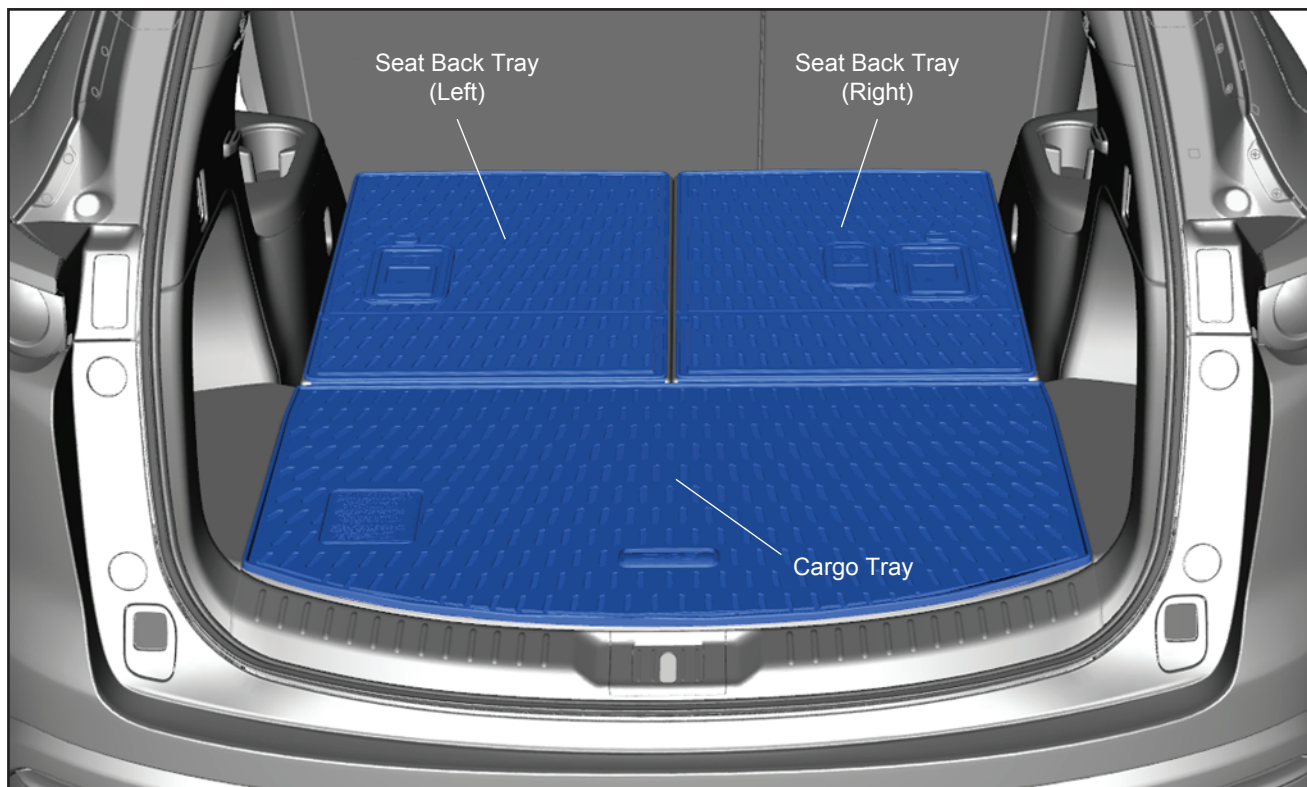
## 1. INSTALLATION VIEW



## 2. PARTS

※ Parts shown below are not in scale.

Before installation, verify that the kit includes all the following parts and that they are free of dirt, scratches, or damage.

Part	Name	Qty.	Part	Name	Qty.	Part	Name	Qty.
	Cargo Tray	1		Seat Back Tray (Left)	1		Seat Back Tray (Right)	1
Part	Name	Qty.	Part	Name	Qty.	Part	Name	Qty.
 (0000-8B-N11)	Cap, Strap	2	 (0000-8B-N11)	Cap, Lever	2	 (0000-8B-N11)	Cap, Tether Anchor	1
Part	Name	Qty.	Part	Name	Qty.	Part	Name	Qty.
	Velcro Hook Strip (Loop Fastener)	2		Fastener	4		Installation and User's Instructions	1

### 3. BEFORE INSTALLATION



REQUIRED TOOLS (Make sure they are at hand before starting work.)

♦ Drill ♦ Drill Bit (6 mm) ♦ Adhesive Tape or Drill Stop

#### WARNING


Before performing any work, park the vehicle on level ground, apply the parking brake securely, and then block the wheels. If the vehicle moves while performing work, it may cause injury.

Be careful when handling sharp objects such as drills, hole saws and ultrasonic cutters. If they are handled incorrectly, serious injury may result.

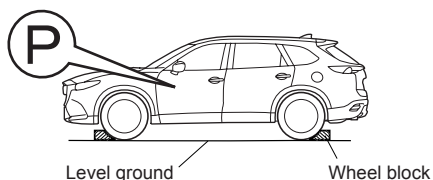


Static electricity can cause an explosion of flammable liquid, vapor or gas in any vehicle or trailer. To reduce risk of serious injury when filling containers:

- Always place container on the ground before filling.
- Keep the nozzle in contact with the container while you are filling it.
- Use only approved containers for flammable liquid.

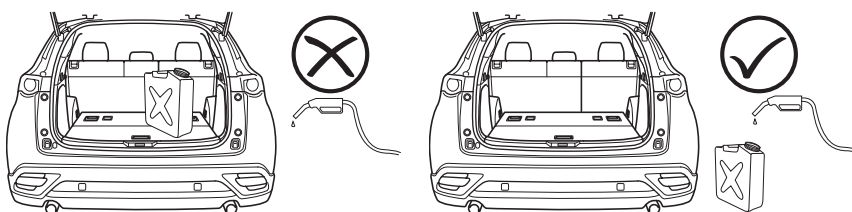

#### CAUTION

When making holes in the vehicle body using a drill or hole saw, be sure to wrap the drill bit with adhesive tape or similar to prevent damage to the vehicle body.




#### CARE & CLEANING


- This product protects your vehicle from being soiled, damaged, or getting wet by small amounts of water. However, the product itself may be soiled or damaged, or get wet.
- When cleaning the cargo tray, use warm water or diluted mild detergent.
- Never use any organic solvent such as thinner or benzene.
- Rinse cargo tray thoroughly with water and allow it to dry before reinstalling.
- When not using the cargo tray, wash the tray with water and dry it completely before storing it on a flat surface. To prevent deformation when storing, do not place any heavy object on top of the tray.

## 4. CARGO TRAY INSTALLATION

- Ensure the Velcro hook strips (loop fasteners) are installed straight across the backside of the seat back trays.
- Because of the strength of the Velcro hook strip, it is required that you properly position the component before removing the tape liner and applying pressure.
- Cargo area should be dry and clear of debris before attempting installation.

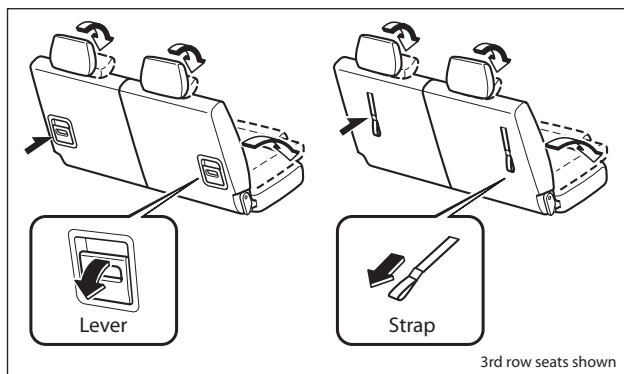


1. Slide the second-row seat all the way forward.
2. Pull the lever or strap to fold down the head restraint, and third-row seat.

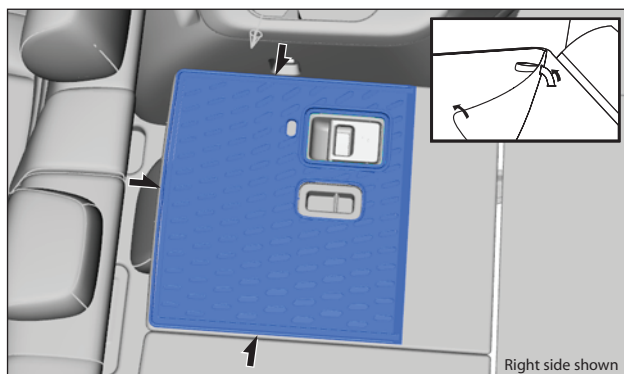


3. Place the seat back tray on the back of the third-row seat.
4. Align the tray to the front and side edges of the seat back.
5. If the seat is equipped with a strap, put the strap through the smallest hole on the tray.
6. Make sure the placement of the seat back tray does not interfere with the seat's ability to move up and down.

**Note:** Do not remove the Velcro hook liner at this time. The component will become extremely difficult to adjust once the Velcro hook strip adheres to the seat back carpet.

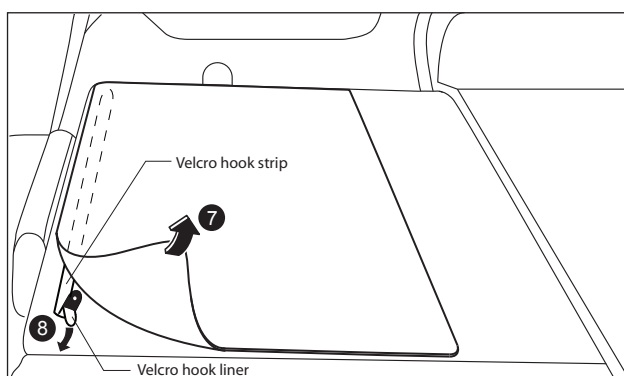


7. Once the position of the seat back tray is set, gently peel back the leading edge of the tray and expose the Velcro hook strip.
8. Remove the Velcro hook liner from the Velcro hook strip.

**Note:** Do not completely remove cargo tray from the seat back, as the proper positioning could be lost.

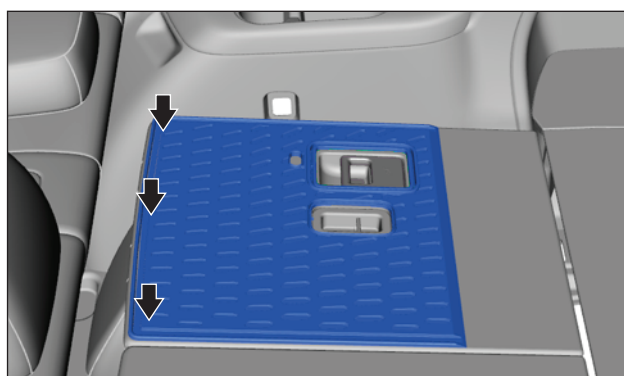

9. Reposition the seat back tray to the proper seat back position, then push down firmly in the area of the Velcro hook strip to adhere to seat back carpet.

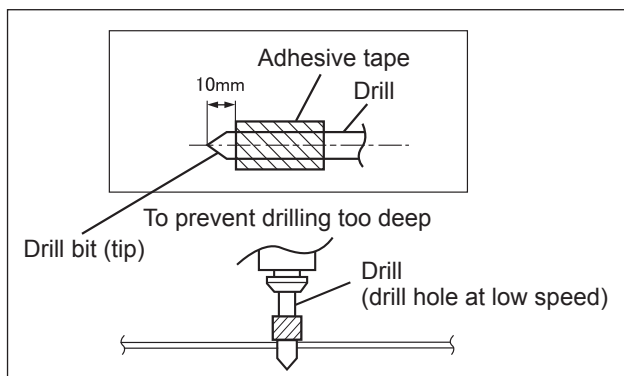


10. Prepare the 6 mm drill bit by wrapping the drill bit with adhesive tape as shown in the diagram.

11. Set the drill speed to low.

**CAUTION**

- Be sure to use a drill which allows the drill speed to be adjusted.
- Be careful when handling sharp objects such as drills.
- Be sure to wrap the drill bit with adhesive tape or use a drill stop to prevent from drilling too deep and damaging the front of the seat.

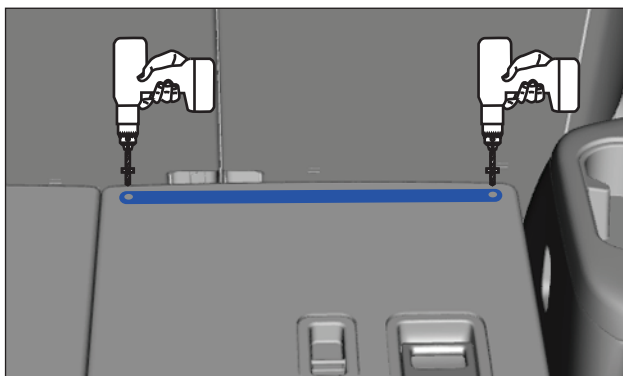


12. Peel the leading edge of the tray component back to expose the fastener holes on Velcro hook strip.

13. Align the drill to the holes on the Velcro hook strip and drill two holes into the back of the seat.

**CAUTION**

- Be careful, do not drill over 10 mm in depth.

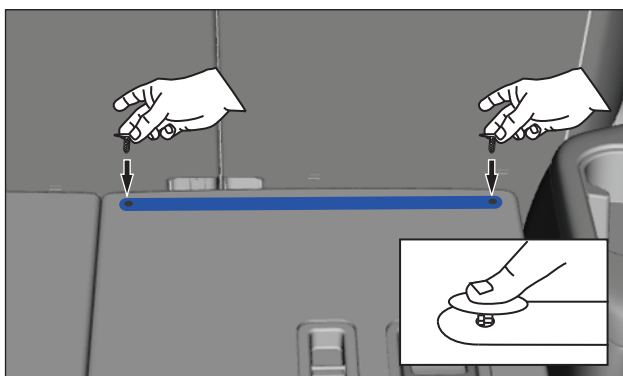


14. Place fasteners in holes and press down to secure.


15. Reposition the seat back tray to the back of the seat.

16. Reconfirm that the seat back tray does not interfere with seat operations. Adjust the position as needed.

17. Repeat steps 1-16 on the opposite seat back.

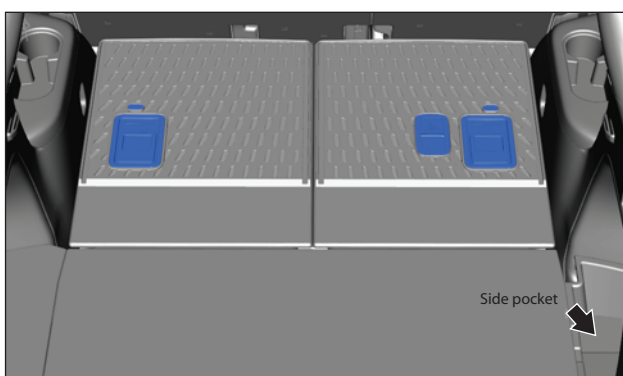


18. Depending on the use of the cargo tray, insert the caps as needed. If the caps are not in use, store them in the bag provided and place them in the side pocket.

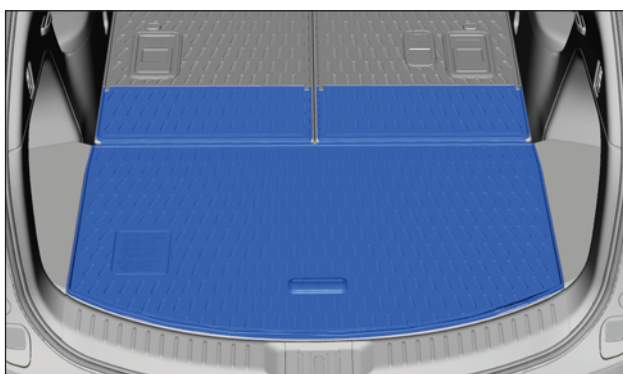

19. Place the cargo tray on top of the cargo board.

20. Align the front of the cargo tray to the seat back trays.

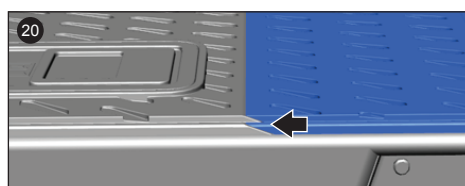

Congratulations! You have completed the installation of the cargo tray.